

# PANTOGRAFO

**Scala retrattile a pantografo per soffitta** composta da 11 gradini, realizzata in lamiera d'acciaio stampato protetto da zincatura elettrolitica.

**Scissor loft ladder** made up from 11 embossed sheet steel treads and protected by electroplating.

**Escalier escamotable accordéon** composé de 11 marches en tôle d'acier emboutie zingué.

**Escalera escamoteable tipo tijera compuesta** por 11 peldaños, realizada en chapa de acero estampado protegido por electro galvanizado.



## UNI EN 14975:2007



Portata: 150 kg. Testata con carico di prova statico 260 kg  
Capacity: 150 kg. Tested with static test load of 260 kg  
Charge maximale: 150 kg. Testé avec charge statique de 260 kg  
Carga: 150kg. Probada con carga de prueba estática 260 kg




Spedita completamente assemblata/pronta per essere installata.  
Delivered completely assembled, ready to be installed.  
Expédié complètement assemblé, prêt pour l'installation.  
Se envía totalmente ensamblada, lista para ser instalada.



**U = 1,1 W/m2K**

Con coibentazione pannello + Termocover-With Hatch panel, insulation + Termocover  
Avec isolation du panneau + Termocover-Con aislamiento panel + Termocover



Struttura a "S" Bianca (RAL 9010)  
S-shaped structure white powder coated (RAL 9010)  
Structure en S peinte en blanc (RAL 9010)  
Estructura en forma de S pintada de blanco (RAL 9010)

## VARIANTI E AGGIUNTE POSSIBILI

Variants and additional accessories - Versions et suppléments possibles - Variantes e integraciones posibles

Ulteriori dettagli a pag. 58 - Further details on page 58 - Plus de détails à la page 58 - Más detalles en la pag. 58



Botola in multistrato di pioppo  
Poplar plywood hatch  
Trappe en peuplier contreplaqué  
Trampilla en multicapa de álamo



Botola in MDF E1  
MDF E1 hatch  
Trappe en MDF E1  
Trampilla en MDF E1



Coibentazione pannello  
Hatch panel insulation  
Isolation du panneau  
Aislamiento panel



Termocover  
Termocover  
Termocover  
Termocover




Secondo corrimano  
Second handrail  
Deuxième main courante  
Segundo pasamanos



# CARATTERISTICHE

Features - Caractéristiques - Características

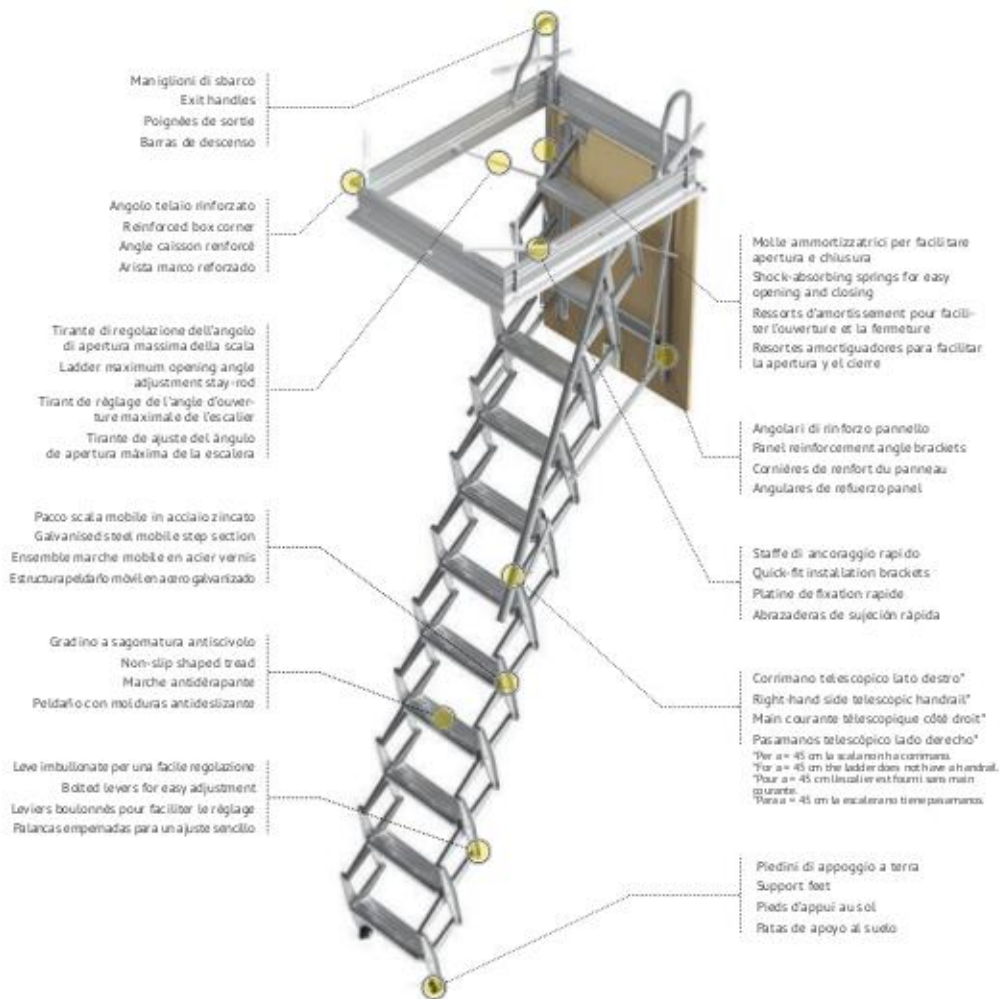


## MISURE STANDARD DISPONIBILI

Standard measurements available - Dimensions standards disponibles - Medidas estándar disponibles

axb	45x70 cm	45x80 cm	45x90 cm	45x100 cm	50x70 cm	50x80 cm	50x90 cm	50x100 cm	60x80 cm	60x90 cm	60x100 cm	
CxLd	25x10 cm				25x10 cm				25x10 cm			
axb	70x70 cm	70x80 cm	70x90 cm	70x100 cm	70x110 cm	70x120 cm	70x130 cm	80x80 cm	80x90 cm	80x100 cm		
CxLd	35x10 cm								35x10 cm			

Per altezze diverse dai 3 m e botole fuori standard, contattare la sede. - For heights different to 3 m and non-standard hatches, contact the headquarters. - Contacter la société pour hauteur supérieure à 3 m et dimension trappe hors standard. - Para alturas distintas de los 3 m y trampillas de medidas no estándar, contactar la central.

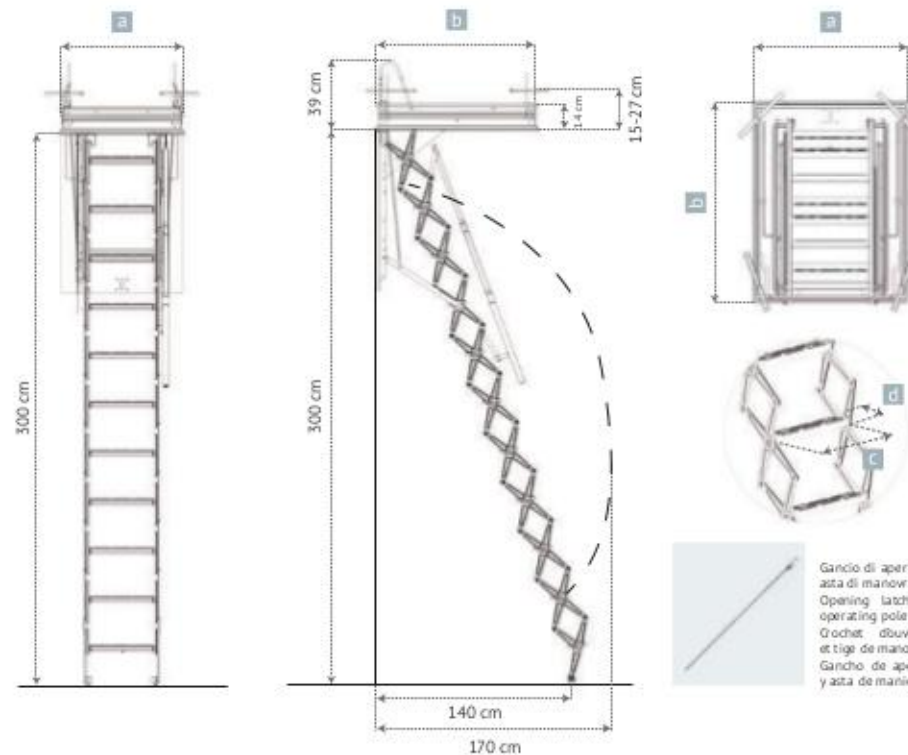

## MATERIALI UTILIZZATI | Materials used - Matériaux utilisés - Materiales utilizados

